


ELECTROMAGNETIC FLOWMETER COMPACT

For conductivit Liquids

MIK

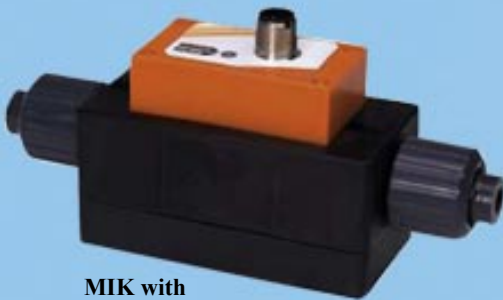

**MIK with
frequency-, switching-, analog output**



**MIK with
digital plug on display**



**MIK with
dosing electronic**



**MIK with
compact electronic**

- Range from liquids, acids and caustic solutions: 0.01-0.5...35-7000L/min
- Accuracy: $\pm 2,0\%$ of full scale
- P_{\max} : bar; t_{\max} : 80°C
- Connection: G $\frac{1}{2}$...2 $\frac{3}{4}$ male, diverse accessories
- Material: normal liquids: PPS, stainless steel aggressive liquids: PVDF, Hastelloy or Tantalum
- Advantage:
 - no moving parts in the measuring tube
 - low pressure loss
 - any mounting position
 - short reaction time - replacement for calorimetric flow switch
 - high quality for lowest price

Despriction

The new KOBOLD Flow meter Type MIK is used for measuring and monitoring smaller and medium-sized flow of conductivity liquids in pipes.

The device operates according to the electromagnetic measurement principle. According to Faraday's Law of magnetic induction a voltage is induced in a conductor moving through a magnetic field. The electrically conductive measuring agent acts as the moved conductor. The voltage induced in the measuring agent is proportional to the flow velocity and is therefore a value for the volumetric flow. The flowing media must have a minimum conductivity. The induced voltage is picked up by two sensing electrodes which are in contact with the measuring agent and sent to the measuring amplifier. The flow rate will be calculated based on the cross sectional area of the pipe.

The measurement is not depending on the process liquid and its material properties such as density, viscosity and temperature. The device may be equipped with a switch, frequency or analogue output. Moreover, there is a compact electronic system to be selected from, which contains a switch and an analogue output.

The device series is completed by an optionally obtainable dosing and counter electronic system. The counter electronics system shows the current flow rate on the first line of the display and shows the partial or overall volume on the second line. A dosing electronic system controls simple filling duties and also measures the flow rate, overall volume and filling volume. The analogue output and two relay outputs can be utilised for the further processing of signals.

Medias

- Electric conductivity liquids
- Acids and caustic solutions
- Drinking, cooling and waste water
- Ground water, raw water
- Aggressive or salty solution
- Unsuitable for oil (missing conductivity)

Areas of Applicationn

Flow monitoring, flow measuring, dosing and counting for

- Machine building
- Chemical Industry
- Paper Industry
- Automobile Industry
- Cement Industry
- Laboratory

Technical Datan

Range:	see table
Accuracy:	±2.0 % of f. s.
Repeat accuracy:	±1.0 % of f. s. (f. s. = full scale)
Measurement process:	electromagnetic
Electrical conductivity:	min. 30 µS /cm
Mounting position:	in all directions, flow in direction of the arrow
In-/Outlet:	3 x DN / 2 x DN
Media temperature:	-20 ... +80 °C (max. +60 °C with PVC-connection set)
Ambient temperature:	-10 ... +60 °C
Max. pressure:	10 bar
Max. pressure loss:	max. 250 mbar at f.s.

Wetted Partsn

Sensor housing:	PPS or PVDF, fibreglass-reinforced
Connection set:	PVC-glue connection or hose connection, weld-on ends stainless steel 1.4404
Elektrodes:	stainless steel 1.4404, Hastelloy C4 or Tantalum
Seal:	NBR, FPM or FFKM
Response time t_{90} :	ca. 1 s
Protection:	IP 65

Connection/Ranges

Connection	Inside diameter	Flow velocity at f.s.	Range
G ½ male	5 mm	approx. 0.45 m/s	10 ... 500 mL/min
		approx. 0.9 m/s	0.05 ... 1.0 L/min
		approx. 2.7 m/s	0.16 ... 3.2 L/min
G ¾ male	10 mm	approx. 2.2 m/s	0.5 ... 10.0 L/min
		approx. 3.5 m/s	0.8 ... 16.0 L/min
G 1 male	15 mm	approx. 3.0 m/s	1,6 ... 32.0 L/min
		approx. 4.7 m/s	2.5 ... 50 L/min
G 1 ½ male	20 mm	approx. 3.3 m/s	3.2 ... 63 L/min
		approx. 5.3 m/s	5.0 ... 100 L/min
G 2 male	32 mm	approx. 3.3 m/s	8 ... 160 L/min
		approx. 6.6 m/s	16 ... 320 L/min
G 2 ¾ male	54 mm	approx. 3.6 m/s	25 ... 500 L/min
		approx. 5.1 m/s	35 ... 700 L/min

MIK-...F300, MIK-...F390

Impulse output:	PNP, Open Collector, max. 200 mA 500 Hz at f. s. (...F300) 50...1000 Hz at f. s. (...F390) factoryset as per customer request
Power supply:	24 V _{DC} ±20 %
Power consumption:	60 mA

MIK-...S300, MIK-...S30D

Electrical connection:	plug M 12 x 1
Display:	duo-LED for switch status
Switching output:	relay SPDT, max. 1A/30V _{DC} or aktive 24 V _{DC} ; N/C / N/O
Schaltpunkt:	10 ...100% of f. s. in 10%-Steps that can be configured by the customer using a rotary switch
Power supply:	24 V _{DC} ±20 %
Power consumption:	80 mA
Electrical connection:	plug M 12 x 1, 5-pin

MIK-...L303; MIK-...L343

Output:	0(4)-20 mA, 3-wire
Max. load:	500 Ω
Spannungsversorgung:	24 V _{DC} ±20%
Power consumption:	80 mA
Electrical connection:	plug M 12 x 1

MIK-...L443 (usage with AUF-3000)

Output:	4-20 mA, 3-wire
Max. load:	500 Ω
Power supply:	24 V _{DC} ±20%
Power consumption:	80 mA
Electrical connection:	plug DIN 43650

MIK-...C3xx (Compact electronics)

Display:	3-digit LED
Analogue output:	(0)4...20 mA adjustable (only MIK-...C34x)
Max. load:	500 Ω
Switching output:	1(2) semiconductor PNP or NPN, set at factory
Contact function:	N/C / N/O-frequency programmable
Settings:	via 2 buttons
Power supply:	24 V _{DC} ±20 %, 3-wire
Power consumption:	120 mA
Electrical connection:	plug M 12 x 1

MIK-...Exxx (Counter electronics)

Display:	LCD, 2 x 8 digit, illuminated total, part and flow quantities, units selectable
Quantity meter:	8-digit
Analogue output:	(0)4...20 mA adjustable
Load:	max. 500 Ω
Switching output:	2 relays, max. 250 V/5 A/1000 VA via 4 buttons
Settings:	reset, MIN / MAX memory, flow monitor, monitoring for part and total quantity, language
Functions:	reset, MIN / MAX memory, flow monitor, monitoring for part and total quantity, language
Power supply:	24 V _{DC} ±20 %, 3-wire
Power consumption:	approx. 150 mA
Electrical connections:	cable connection or M 12 plug


more technical details see data sheet ZED in the brochure Z2

MIK-...Gxxx (Dosing electronics)


Display:	LCD, 2 x 8 digit, illuminated dosing-, total-, and flow quantity, units selectable
Quantity meter:	8-digit
Dosage:	5-digit
Analogue output:	(0)4...20 mA adjustable
Load:	max. 500 Ω
Switching output:	2 relays, max. 250 V/5 A/1000 VA via 4 buttons
Settings:	dosing (relay S2), start, stop, reset, fine dosing, correction amount, flow switch, total quantity, language
Functions:	dosing (relay S2), start, stop, reset, fine dosing, correction amount, flow switch, total quantity, language
Power supply:	24 V _{DC} ±20 %, 3-wire
Power consumption:	approx. 150 mA
Electrical connection:	cable connection or M 12 plug

more technical details see data sheet ZED in the brochure Z2


Electrical Connections

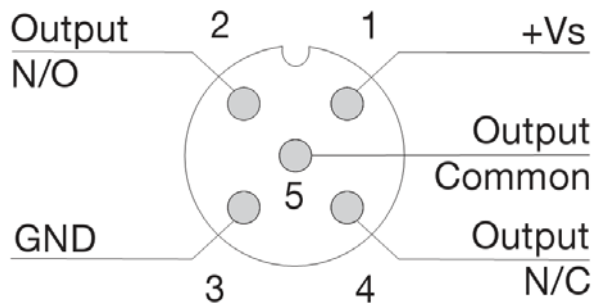


MIK-...S300 MIK-...S30D

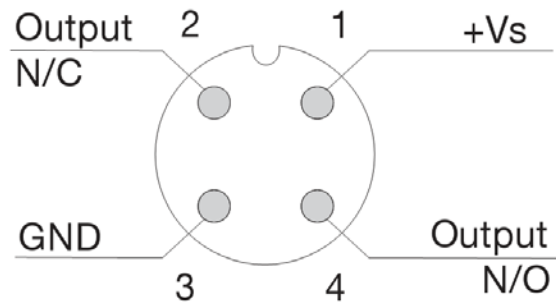


MIK-...L3x3, MIK-...F3x0

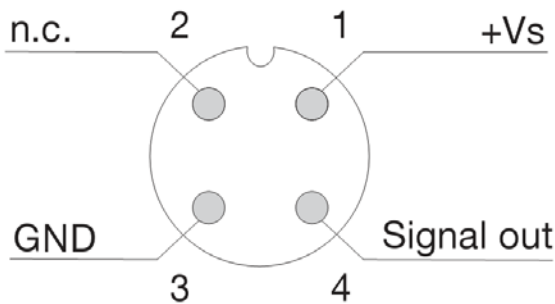


MIK-...L443

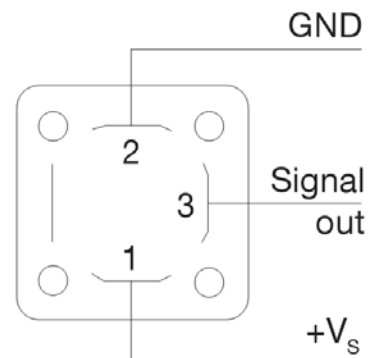

MIK-...C30*

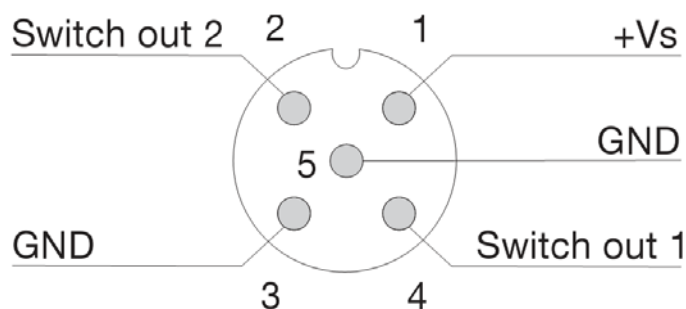


MIK-...C34*

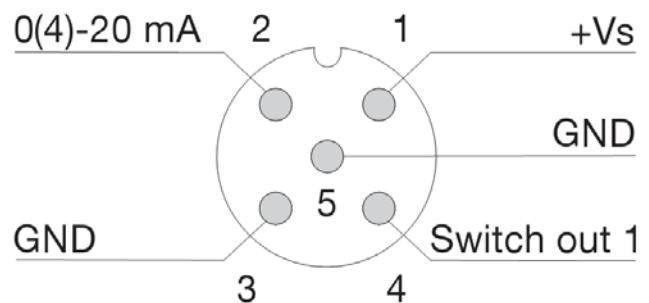

MIK-...E14R, MIK-...G14 Cable Connection

Wire number	MIK-...E14R Counter electronics	MIK-...G14R Dosing electronics
1	+24 V _{DC}	+24 V _{DC}
2	GND	GND
3	4-20 mA	4-20 mA
4	GND	GND
5	n.c.	Control 1*
6	Reset part quantity	Control 2*
7	Relay S1	Relay S1
8	Relay S1	Relay S1
9	Relay S2	Relay S2
10	Relay S2	Relay S2

Plug Connection

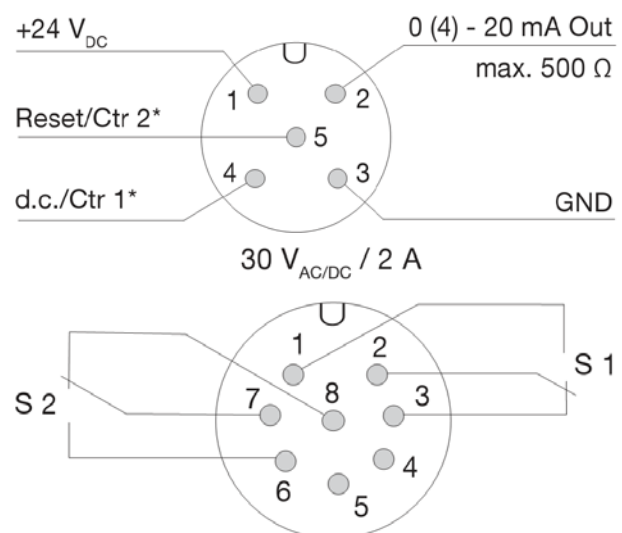

Control 1 <-> GND: Start-Dosing
 Control 2 <-> GND: Stop-Dosing
 Control 1 <-> Control 2: Reset-Dosing

Não há responsabilidade por eventuais erros, sujeito a mudança sem aviso prévio.

Order Details

(Example: MIK-5NA 10 A F300)

Model	Range	Connection set	Electronics
MIK-5NA.. = PPS-housing, NBR-seal, stainless steel-elektrode	..08.. = 10...500 mL/min, G ½ ..10.. = 0,05...1,0 L/min, G ½ ..15.. = 0,16...3,2 L/min, G ½	..A.. = without ¹⁾ ..P.. = PVC-hose connection ..E.. = stainless steel-weld-on ends	frequency output ..F300 = M12-plug, 500 Hz ..F390 = M12-plug, 50...1000 Hz ²⁾
	..20.. = 0,5...10,0 L/min, G ¾ ..25.. = 0,8...16,0 L/min, G ¾	..A.. = without ¹⁾ ..K.. = PVC-glue connection ..P.. = PVC-hose connection ..E.. = stainless steel-weld-on ends	switching output ..S300 = relay, M12-plug ..S30D = aktive 24 V _{DC} , M12-plug
MIK-5VA.. = PPS-housing, FPM-seal, stainless steel-elektrode	..30.. = 1,6...32,0 L/min, G 1 ..35.. = 2,5...50,0 L/min, G 1	..A.. = without ¹⁾ ..K.. = PVC-glue connection ..P.. = PVC-hose connection ..E.. = stainless steel-weld-on ends	analogue output ..L303 = M12-plug, 0 - 20 mA ..L343 = M12-plug, 4 - 20 mA ..L443 = DIN-plug, 4 - 20 mA
MIK-6FC.. = PVDF-housing, FFKM-seal, Hastelloy-elektrode	..50.. = 3,2...63 L/min, G 1½ ..55.. = 5,0...100 L/min, G 1½	..A.. = without ¹⁾ ..K.. = PVC-glue connection ..E.. = stainless steel-weld-on ends	compact electronics ..C30R = 2 x Open Coll. PNP ..C30M = 2 x Open Coll. NPN ..C34P = 0(4) - 20 mA, 1 x Open Coll. PNP ..C34N = 0(4) - 20 mA, 1 x Open Coll. NPN
MIK-6FT.. = PVDF-housing, FFKM-seal, Tantalum-elektrode	..60.. = 8...160 L/min, G 2 ..65.. = 16...320 L/min, G 2		counter electronics ..E14R = LCD, 0(4)-20 mA, 2 x relay, 1 m Kabel ..E34R = LCD, 0(4)-20 mA, 2 x relay, M12 plug
	..80.. = 25...500 L/min, G 2 ¾ ..85.. = 35...700 L/min, G 2 ¾		dosing electronics ..G14R = LCD, 0(4)-20 mA, 2 x relay, 1 m Kabel ..G34R = LCD, 0(4)-20 mA, 2 x relay, M12 plug

¹⁾ incl. frontal gaskets (2 pc. O-rings)

²⁾ please specify frequency at full scale in clear text while ordering.

Weight Sensor

Weight Electronics

Model	PPS	PVDF
MIK-...08/10/15 (½")	approx. 180 g	approx. 210 g
MIK-...20/25 (¾")	approx. 190 g	approx. 225 g
MIK-...30/35 (1")	approx. 270 g	approx. 325 g
MIK-...50/55 (1 ½")	approx. 410 g	approx. 500 g
MIK-...60/65 (2")	approx. 560 g	approx. 610 g
MIK-...80/85 (2 ¾")	approx. 1200 g	approx. 1370 g

Model	Weight
MIK-...F3x0 MIK-...S30x MIK-...Lxx3	approx. 80 g
MIK-...C3xx	approx. 300
MIK-...Exxx MIK-...Gxxx	approx. 250 g

Total weight = Weight sensor + Weight electronics





Não há responsabilidade por eventuais erros, sujeito a mudança sem aviso prévio.

Dimensions

Model	G	L1	L2	L3	L4	L5	L6	H1	H2
MIK-xxx08A MIK-xxx10A MIK-xxx15A	G ½	118	90	14	46	58	36	43	28
MIK-xxx20A MIK-xxx25A	G ¾	122	90	16	46	58	36	43	28
MIK-xxx30A MIK-xxx35A	G 1	126	90	18	46	58	36	49,5	29,5
MIK-xxx50A MIK-xxx55A	G 1 ½	134	90	22	68	80	36	66	31,5
MIK-xxx60A MIK-xxx65A	G 2	138	90	24	68	80	36	72	36
MIK-xxx80A MIK-xxx85A	G 2 ¾	202	150	26	96	110	75	104	52






*MIK-...F3x0, MIK-...S30x,
MIK-...L3x3*

MIK-...L443

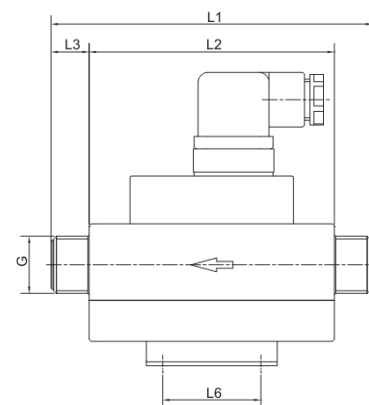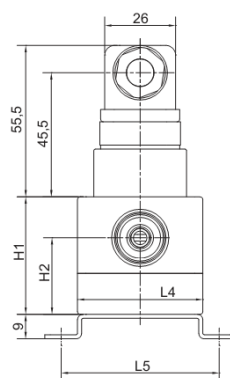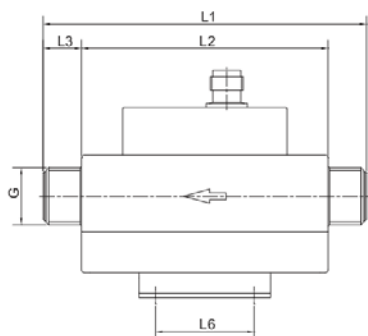


MIK-...C3xx

MIK-...Ex4R, MIK-...Gx4R

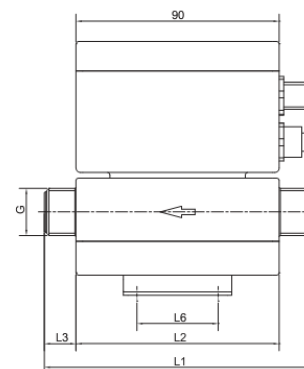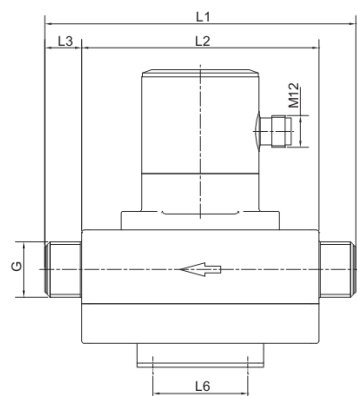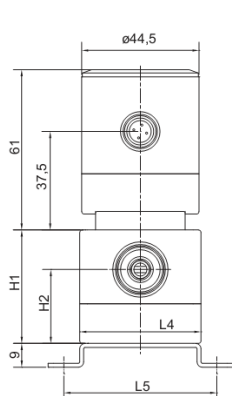


Não há responsabilidade por eventuais erros, sujeito a mudança sem aviso prévio.

*Dimensions connection set
PVC-gluе connection*

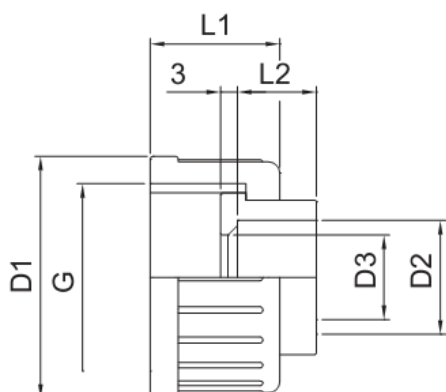


G	D1	D2	D3	L1	L2
G ½	nicht lieferbar				
G ¾	Ø 35	Ø 16	Ø 10,5	21	14
G 1	Ø 43	Ø 20	Ø 15	23	16
G 1 ½	Ø 60	Ø 32	Ø 26	27	22
G 2	Ø 74	Ø 40	Ø 33	30	26
G 2 ¾	Ø 103	Ø 63	Ø 54	38	38

*Dimensions connection set
PVC-hose connection*

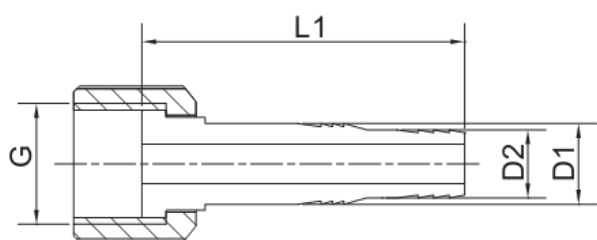

G	D1	D2	L
G ½	Ø 14	Ø 12	56
G ¾	Ø 18	Ø 16	60
G 1	Ø 22	Ø 20	67
G 1 ½	nicht lieferbar		
G 2	nicht lieferbar		
G 2 ¾	nicht lieferbar		

*Dimensions connection set
stainless steel weld-on ends*

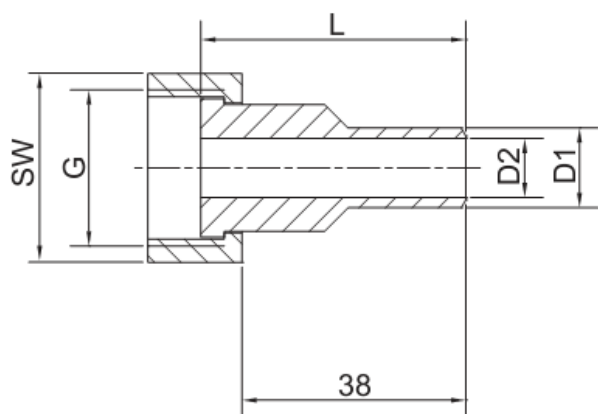

G	SW	L	D1	D2
G ½	24	45	Ø 10,2	Ø 5
G ¾	32	45	Ø 13,5	Ø 10
G 1	41	45	Ø 19	Ø 15
G 1 ½	55	60	Ø 25	Ø 20
G 2	70	60	Ø 38	Ø 32
G 2 ¾	90	60	Ø 60,3	Ø 54